


尺寸

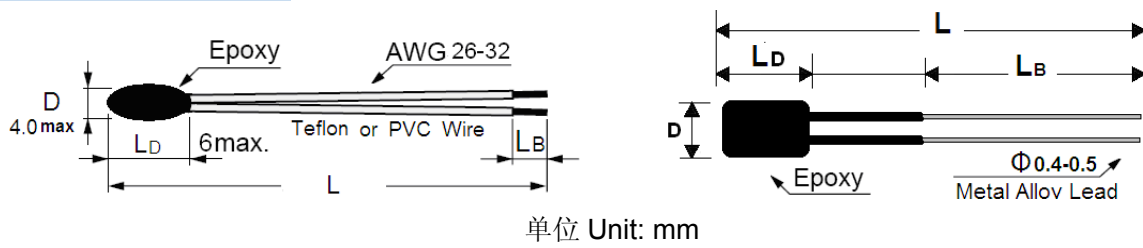

电性能参数

型号	标称值	B 值 (K)	额定功率 (mW)	耗散系数(δ) (mW/°C)	热时间常数 (S)
VT249R1□□90C3588G	249.1Ω	3588	10-200 (depends on size)	2-50 (depends on size)	≤15 (depends on size)
VT108R8□□90C3565G	108.8Ω	3565			
VT120R0□□100C4230G	120.0Ω	4230			
VT310R0□□80C4010G	310.0Ω	4010			
VT340R0□□80C4010G	340.0Ω	4010			
VT244R8□□90C4110G	244.8Ω	4110			
VT4K000□□80C4010G	4000Ω	4010			
VT4K200□□80C4262G	4200Ω	4262			
VT374R0□□80C3495G	374.0Ω	3495			
VT930R0□□90C4010G	930.0Ω	4010			
VT334R0□□80C4305G	334.0Ω	4305			
VT778R0□□50C3245G	778.0Ω	3245			
VT362R0□□80C4180G	362.0Ω	4180			
VT320R0□□80C3218G	320.0Ω	3218			
VT316R0□□80C3765G	316.0Ω	3765			
VT1V250□□80C3650A	1.25V	3650			
VT2V300□□80C3740A	2.30V	3740			
VT2V500□□80C4050A	2.50V	4050			
VT3V300□□80C4050A	3.30V	4050			

◆ 可根据客户要求定做特殊规格。